Terminal Block Series

SNP30-VF-1/SNP30-IF-1/SNP30-VF-2

Characteristics

Rated input voltage: AC200-240V 50/60Hz (power factor measured at AC230V and full load)

Model No.	Constant output voltage	Load	Max output Current	PF	Ta	Tc	L×W×H
■ SNP30-12VF-1	12V	0-30W	2.5A	≥ 0.9	50℃	80℃	251X30X16
■ SNP30-24VF-1	24V	0-30W	1.25A	≥0.9	50℃	80℃	251X30X16
■ SNP30-12VF-2	12V	0-30W	2.5A	≥ 0.9	45℃	85℃	251X30X16
■ SNP30-24VF-2	24V	0-30W	1.25A	≥0.9	45℃	85℃	251X30X16

Model No.	Constant output current	Load	Max output voltage	PF	Ta	Tc	L×W×H
■ SNP30-350IF-1	350mA	15-30W	43-86VDC	≥0.9	50℃	80℃	251X30X16
■ SNP30-500IF-1	500mA	15-30W	30-60VDC	≥0.9	50℃	80℃	251X30X16
■ SNP30-700IF-1	700mA	15-30W	21-43VDC	≥0.9	50℃	80℃	251X30X16
■ SNP30-1050IF-1	1050mA	15-30W	14-29VDC	≥0.9	50℃	80℃	251X30X16
■ SNP30-1400IF-1	1400mA	15-30W	11-22VDC	≥0.9	50℃	80℃	251X30X16

Reliable Technical Data

- Rated Input Voltage:200-240VAC
- Input Frequency:50/60Hz
- Output Power:30W
- Body:PC
- Open Circuit;Short Circuit;Over Load;
- Over Heat Protection

- Safety According to EN61347-1,EN61347-2-13
- EMI According to EN55015
- EMS According to
- EN61000-3-2;EN61000-3-3;EN61547
- EMF According to EN62493-2010
- ERP According to EN1194-2012

Dimension in mm

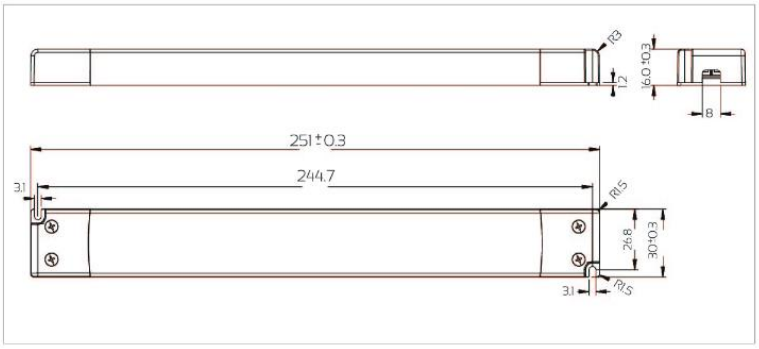

SELV

TÜV ☑ ☑ ☐ ☐ ☑ ☐ ☐ ☐ ☐ ☐