


Product name: **SNP60-VF/SNP60-IF**

Hits: 305

Category: Super Slim LED Power Supply

Model: LED drivers/LED power supply

Product details

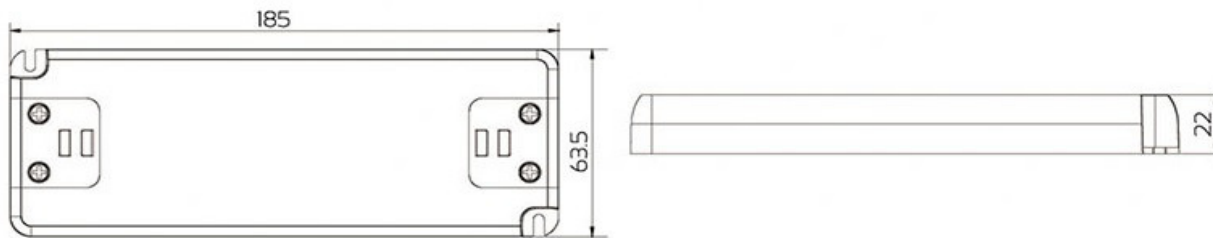

Dimension in mm

Characteristics

Rated input voltage: AC200-240V 50Hz (power factor measured at AC230V and full load)

Model No.	Constant output voltage	Load	Max output Current	PF	Ta	Tc	L×W×H
SNP60-12VF	12V	0-60W	5.0A	≥ 0.9	45 °C	85 °C	185X63.5X22
SNP60-24VF	24V	0-60W	2.5A	≥ 0.9	45 °C	85 °C	185X63.5X22

Model No.	Constant output current	Load	Max output voltage	PF	Ta	Tc	L×W×H
SNP60-500IF	500mA	30-60W	120VDC	≥ 0.9	45 °C	85 °C	185X63.5X22
SNP60-700IF	700mA	30-60W	86VDC	≥ 0.9	45 °C	85 °C	185X63.5X22
SNP60-1050IF	1050mA	30-60W	57VDC	≥ 0.9	45 °C	85 °C	185X63.5X22
SNP60-1400IF	1400mA	30-60W	42.5VDC	≥ 0.9	45 °C	85 °C	185X63.5X22
SNP60-2100IF	2100mA	30-60W	28.5VDC	≥ 0.9	45 °C	85 °C	185X63.5X22

Reliable Technical Data

- Rated Input Voltage:200-240VAC
- Input Frequency:50/60Hz
- Output Power:60W
- Body:PC
- Open Circuit;Short Circuit;Over Load;
- Over Heat Protection
- Safety According to EN61347-1,EN61347-2-13
- EMI According to EN55015
- EMS According to EN61000-3-2;EN61000-3-3;EN61547
- EMF According to EN62493-2010
- ERP According to EN1194-2012

SELV

CE, RoHS, REACH, SAA, CB