


PREMIUM | LED Linear Lighting System
LED DESIGN GmbH



Trunking Rail

- 5 Wire: L1, L2, L3, N,FG
- 8 Wire: L1, L2, L3, N, FG, CHR, + 2 wires for Dimming/Emergency
- 12 Wire: L1, L2, L3, N, FG, CHR, + 2 wires for Dimming
+4 wires for Emergency converter & Battery

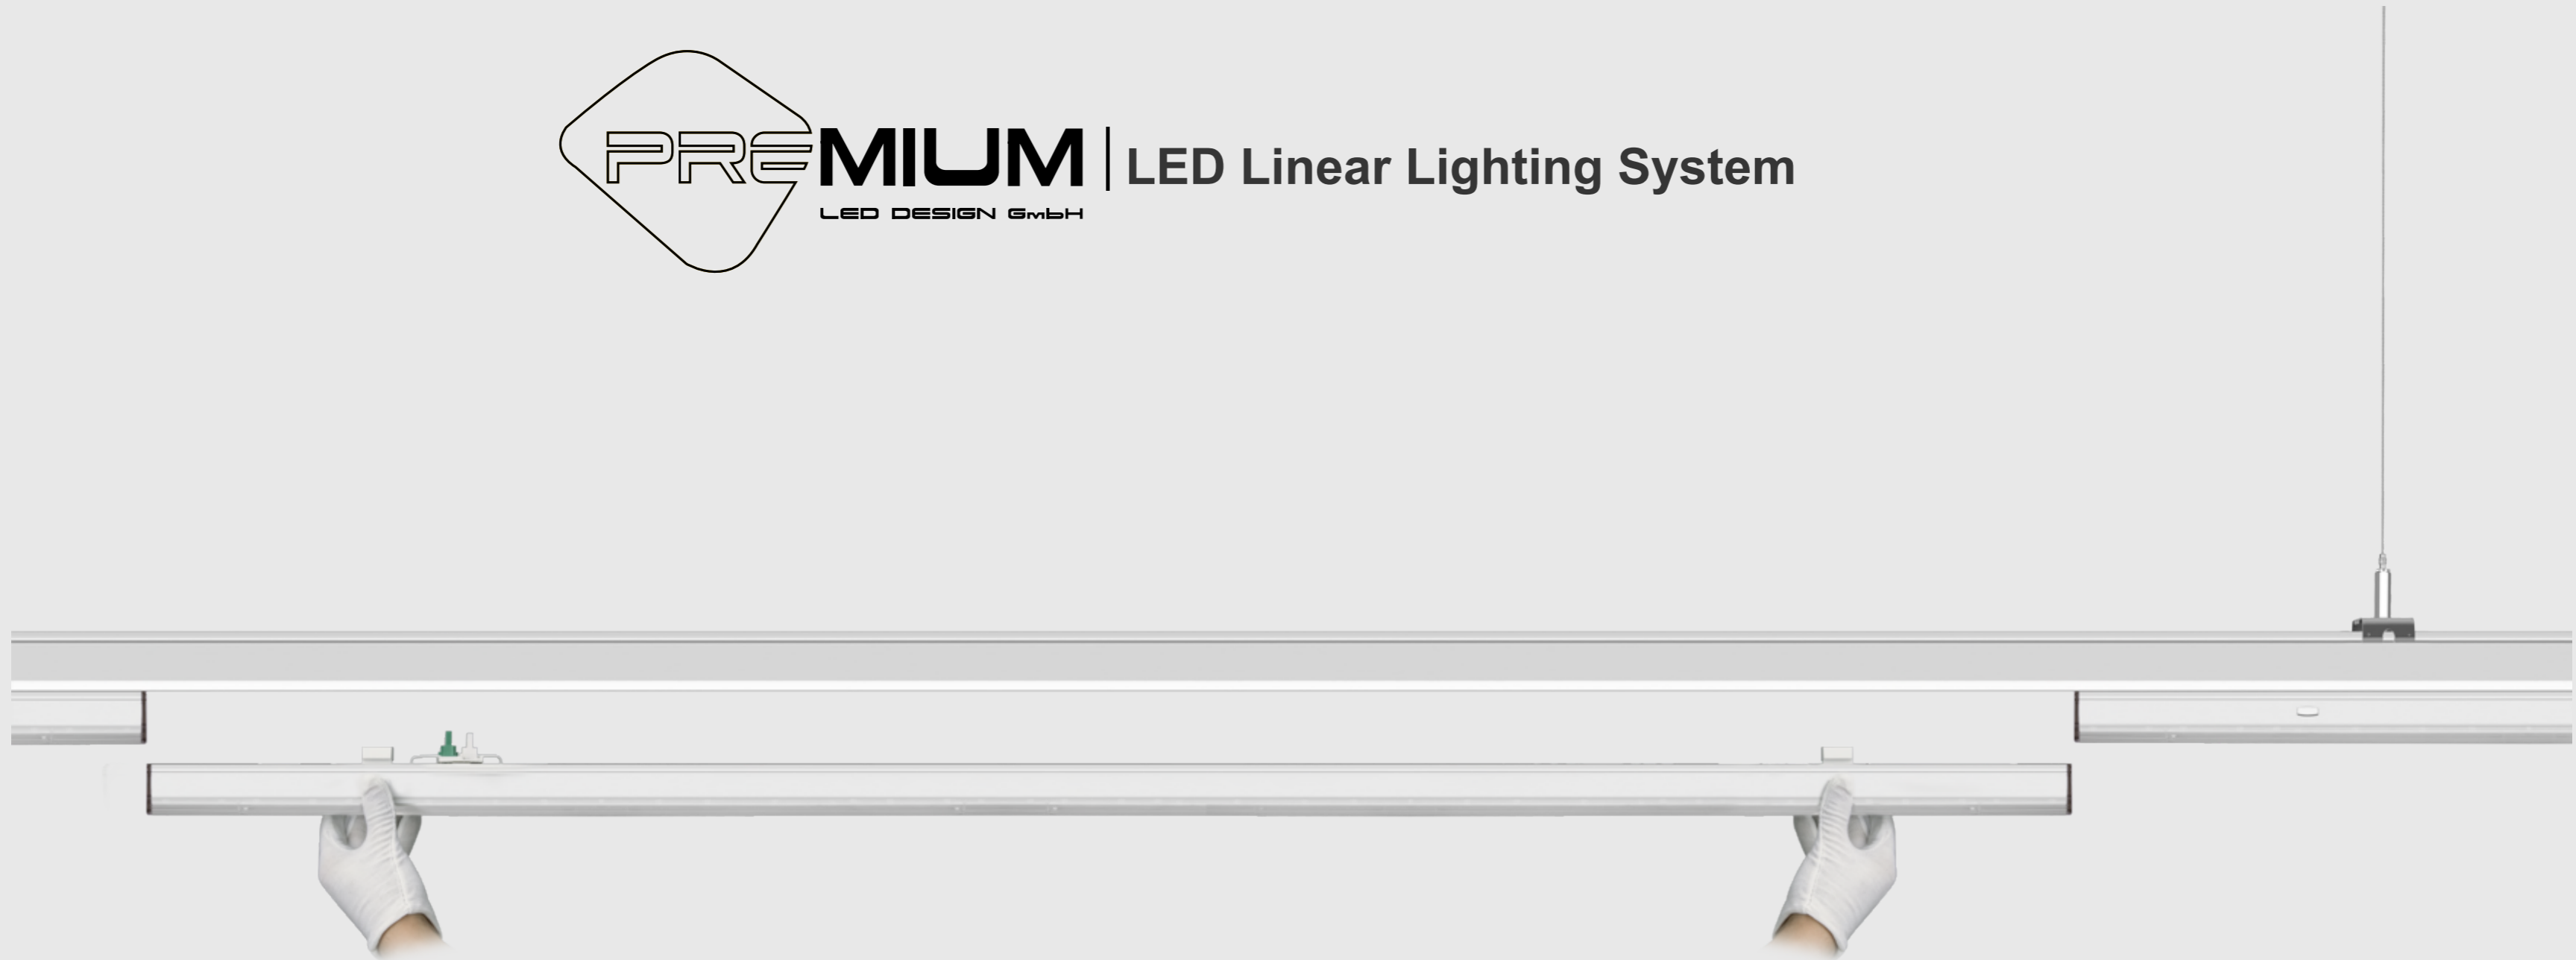

Luminaire



- CTT: 3000K, 4000K, 5000K, 6000K
- Lens: SP(Sharp-25°), NR(Narrow-60°), WD(Wide-90°), FD(Flood-120°)
DS(Double Asymmetric),RS/LS(Right/Left Asymmetric),FF(Flat-120°)
- Power Factor: 0.95, CRI: >80Ra

Length	Discription
600mm	5 Wire
	8 Wire
	12 Wire
900mm	5 Wire
	8 Wire
	12 Wire
1500mm	5 Wire
	8 Wire
	12 Wire
3000mm	5 Wire
	8 Wire
	12 Wire
4500mm	5 Wire
	8 Wire
	12 Wire

Length	Power	Lumen
1500mm	35W	5600lm
	50W	8000lm
	70W	11200lm
3000mm	70W	11200lm
	100W	16000lm
	140W	22400lm

Discription

Dimming Driver - Extra



- 1-10V Dimming
- DALI Dimming
- DALI PS

Emergency Driver



- With 6W output
- With 12W output


Emergency Battery



- 1800mAh Battery
- 3600mAh Battery

Discription

Motion Sensor Module

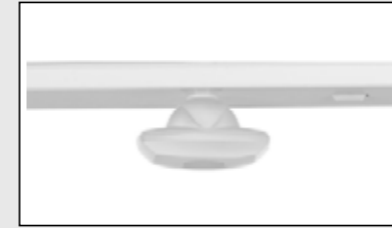

- 600mm 8m detection
- 15m detection
- 1500mm 8m detection
- 15m detection

Track Rail Module



- 600mm 5 Wire
- 8 Wire
- 12 Wire
- 900mm 5 Wire
- 8 Wire
- 12 Wire
- 1500mm 5 Wire
- 8 Wire
- 12 Wire

Discription




L Node Connector

5 Wire

8 Wire

12 Wire

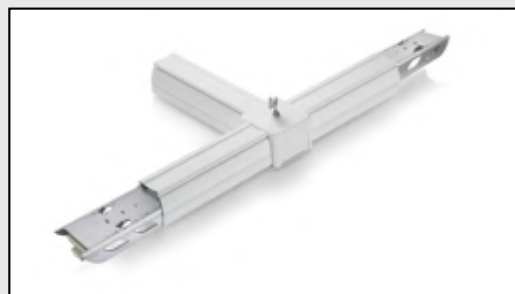

T Node Connector

5 Wire

8 Wire

12 Wire



X Node Connector

5 Wire

8 Wire

12 Wire



Exit Sign Module

600mm

900mm

1500mm

Discription



Feed In Box

5 Wire

8 Wire

12 Wire



Feed Out Box

5 Wire



Blank Cover

PC - 600mm

PC - 900mm

PC - 1500mm



End Cap

with Coreshine LOGO
or Neutral

Discription



Suspension Accessory

Cord - 3m

Rod - 1m

Chain - 3m



Surface-Mounted Accessory

for surface mounting



Mounting Clip

with hole of diameter
13.5mm



Female Connector

5 Wire

8 Wire

12 Wire



Wire Connector

Single Wire Connector

Discription



Feed In Connector

5 Wire

8 Wire

12 Wire



Conduit Gland

M20*1.5mm, outlet 15.2mm




Power Supply Cable

20A, 2.5mm²*3
L: 3000mm or customized



Cable Gland

M20*1.5mm, outlet 14.0mm

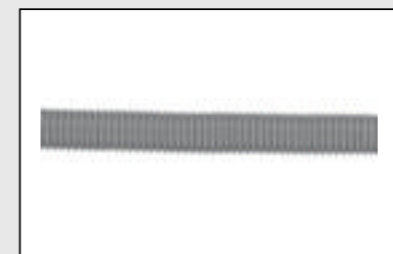

Conduit

inner diameter 14.1mm
L: 2000mm or customized